

PACKAGED TERMINAL AIR CONDITIONING/ HEAT PUMP

Replacement PTAC/PTHP Chassis Replaces:  
American Standard- RemoteAire Type 42

NOMINAL CAPACITY:

9,000, 12,000,  
15,000, BTU/h

ColdPointCorp, Rome, New York 13440 • Phone (315)339-2331 • Fax (315)339-2358 • Web: www.adirondackaire.com

Shown w/optional Supply Air Duct



Centrifugal Condenser Fan

Description:

Adirondack-Aire '42' Series zerOzone chassis provides environment friendly, high efficiency cooling and heating where individual, quiet control of space is a priority. This application flexible unit is also a direct replacement for American Standard-RemoteAire type 42 chassis. The chassis is a part of a complete system, which consists of the chassis, a wall sleeve, room cabinet, outdoor louver, and sometimes a separate heat section. The chassis contains the compressor, indoor and outdoor heat exchangers, fan motors & fans, and controls. The '42' is dimensionally identical to the original for a fast, easy, and trouble free installation. Quality components, careful design and testing and the latest in environment friendly technology assure EPA compliance, long life, user satisfaction, and lower energy cost! Consider the extensive list of standard features which includes: Rust-Block\* corrosion protection system, centrifugal condenser fan, evaporator freeze protection, pull handle, permanent electrostatic air filter, and high-

pressure over protection..... and Adirondack-Aire is the replacement solution the competition can't match. Cold Point Corp. backs the '42' with a customer friendly one-year parts and labor warranty and five-year compressor warranty, (see Warranty document for details). Heat Pumps are available and include a thermostatic expansion valve and condenser drain pan valve. Consult factory for availability of heat pumps.

Application & Benefits:

The Adirondack-Aire '42' series zerOzone replacement chassis fits the existing American Standard wall sleeves and room cabinets without modification. A forward curved centrifugal condenser fan provides proven airflow performance. The standard high-pressure switch and evaporator freeze protection stops unit operation before damage occurs should airflow become reduced or obstructed due to dirty coils, obstructed airflow, or motor failures or lock-up.....a premium feature usually found only in expensive commercial systems. Condensate re-evaporation and the Rust-Block system assure a stain-free building exterior. High efficiency compressors provide demonstrated reliability and low sound levels...and because the chassis dimensions and construction details are like the original replacement work is fast and easy. Using Adirondack-Aire replacements eliminates the need for room and exterior wall renovation and is the solution that gets your property back in service quickly and at the lowest total cost. Choose the optional room cabinet to give the unit a brand new look and improve room aesthetics.

Options/Accessories:

- Heat Pump (consult factory)
- Control options
- Wall Sleeves
- Supply Air Collar
- Motorized fresh air
- Louvers
- Electric heat or Hydronic heat
- Cabinets
- 115V & 265/277V (availability varies by model size)

\* Rust-Block corrosion protection system consists of:  
•Heavy gauge galvanized steel construction with powder paint finished condenser & evaporator pans

•Galvanized or Aluminum Condenser Fan  
•Stainless steel compressor and condenser motor studs


•Magnaguard and/or stainless steel screws and fasteners

Standard Features

- 1). Made in USA
- 2). Designed for easy installation & compatibility. Dimensionally identical to original American Standard- Type 42 chassis.
- 3). Exclusive Rust-Block corrosion protection
- 4). High efficiency PSC type fan motors w/built-in temperature protection
- 5). UL listed components and construction
- 6). Quiet, durable, and efficient compressor with built-in pressure & temperature protection
- 7). Heavy Gauge G90 galvanized steel construction with powder coat painted condenser & evaporator pans
- 8). High efficiency copper tube-aluminum fin evaporator and condenser coils
- 9). Centrifugal condenser fan for proven airflow performance
- 10). Condensate re-evaporation
- 11). High Pressure switch with manual reset
- 12). Frost free low ambient cooling\*
- 13). Electrostatic air filter
- 14). Heat pump heating to 35°F outdoor\*\*
- 15). Capillary expansion. Thermostatic expansion valve (heat pumps)
- 16). Positive shift reversing valve (heat pumps)
- 17). Precision charged with zerOzone R-410A refrigerant
- 18). Line Cord (ex. 265V)

\*Cooling operation locks-out at 34° F outdoor temperature and restarts @ 55° F.

\*\*Actual temperature affected by relative humidity, solar effect, etc.




## 42 Dimensions and Specifications

**Note:** Due to Cold Point Corporation's ongoing quality & product development programs, design and specifications may change. Always consult factory to verify the information provided here.

### DIMENSIONAL DETAIL '42'

**IMPORTANT!** Chassis must replace a unit of like capacity to assure proper **power supply**.

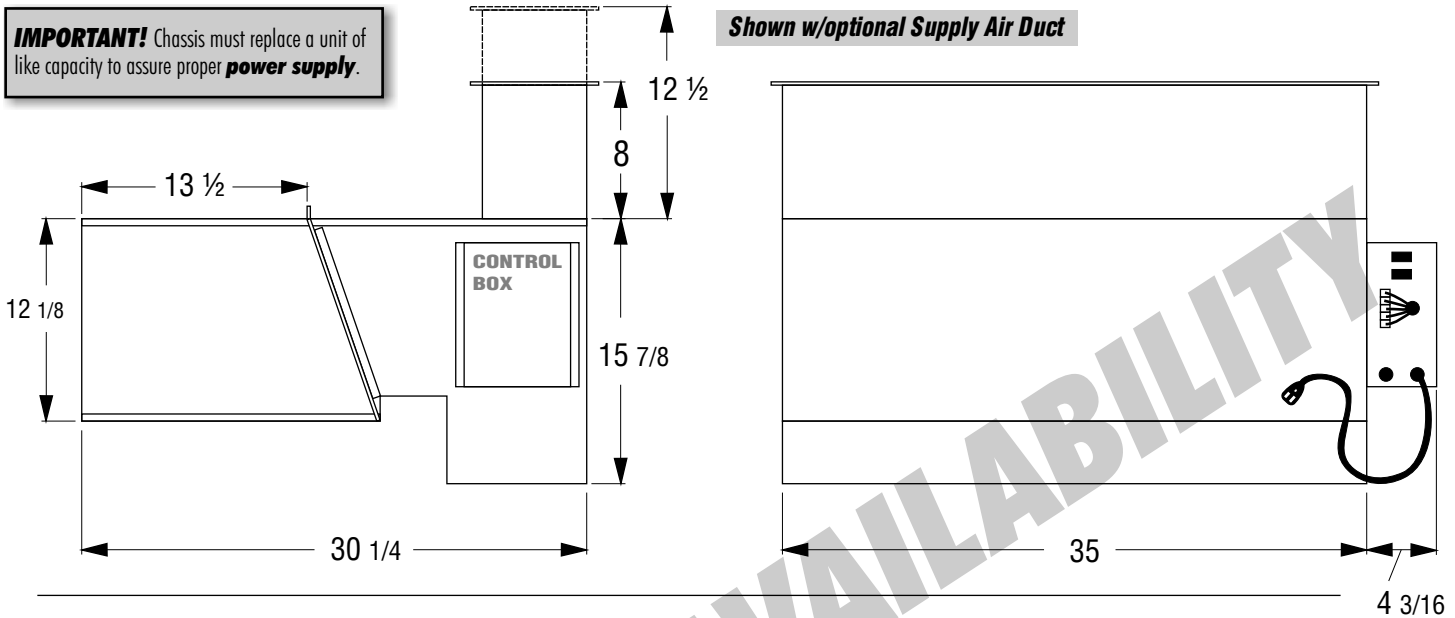

#### 42 CHASSIS ZEROZONE ELECTRICAL RATINGS (1)

Model	Voltage/ HZ/Ph	Evap. Mtr. HP**	Evap. Mtr. Amps**	Cond. Mtr. HP	Cond. Mtr. Amps	Comp RLA	Comp LRA	TOTAL AMPS**	CKT AMPAC**	MAX FUSE	MIN. Volts	Line Cord
42- 09	115/60/1	1/10	1.2	1/5	3.2	8.0	50.0	12.4	14.4	20	104	5-20P
42- 09	208/230/60/1	1/10	0.6	1/5	1.2	3.7	22.0	5.5	6.4	15	197	6-15P
42- 09	265/60/1	1/10	0.6	1/5	1.2	3.5	22.0	5.3	6.2	15	240	N/A
42- 12	115/60/1	1/10	1.2	1/5	3.2	10.5	57.0	14.9	17.5	25	104	5-20P
42- 12	208/230/60/1	1/10	0.6	1/5	1.2	5.2	26.0	7.0	8.3	15	197	6-15P
42- 12	265/60/1	1/10	0.6	1/5	1.2	4.3	25.0	6.1	7.2	15	240	N/A
42- 15	208/230/60/1	1/10	0.6	1/4	2.0	6.6	33.0	9.2	10.9	15	197	6-15P
42- 15	265/60/1	1/10	0.6	1/4	1.1	5.6	28.0	7.3	8.7	15	240	N/A

\*\*w/optional Adirondack-Aire Blower Section

(1) If electric heat option is selected see Electric Heat Ratings Table: Total AMPS, Ampacity & Fuse size is the larger value.

#### Electric Heat Ratings (optional)

Heater No. (wcu)	Volt	Watts	BTU/h	HTR Amps	Total HTR Amps	Min CKT Amps	Max. Fuse	Line Cord
2	208	1,800	6,140	8.7	9.3	12.0	15	6-15P
	230	2,200	7,500	9.6	10.2	13.0	15	6-15P
	265	2,900	9,900	10.9	11.5	15.0	15	N/A
	277	3,190	10,900	11.5	12.1	15.0	15	N/A
3	208	2,450	8,350	11.8	12.4	16.0	20	6-20P
	230	3,000	10,200	13.1	13.7	17.0	20	6-20P
	265	4,000	13,640	15.1	15.7	20.0	20	N/A
	277	4,350	14,830	15.7	16.3	21.0	25	N/A
4	208	3,270	11,150	15.7	16.3	21.0	25	6-30P
	230	4,000	13,640	17.4	18.0	23.0	30	6-30P

#### NEMA Configurations

##### Non Locking Plugs/Receptacles

Voltage	125V	250V	277V
15A Recp.	5-15R 	6-15R 	7-15R 
15A Plug	5-15P 	6-15P 	7-15P 
20A Recp.	5-20R 	6-20R 	7-20R 
20A Plug	5-20P 	6-20P 	7-20P 
30A Recp.	5-30R 	6-30R 	7-30R 
30A Plug	5-30P 	6-30P 	7-30P 

#### 42 ZEROZONE PERFORMANCE TABLE (Tested in Accordance w/ARI)

Model	COMP	Cond. Fan Type/Air Direction	Cool BTUH	SENS BTUH	EER	CFM HI/ LO*	REFRIG
42- 09	Rotary	Centrifugal/ Blow Thru	9,000	7,300	9.1	440/350	R410A
42- 12	Rotary	Centrifugal/ Blow Thru	11,800	8,500	9.3	440/350	R410A
42- 15	Rotary	Centrifugal/ Blow Thru	16,000	11,500	10.1	550/450	R410A

\*Dry Coil Airflow w/optional Adirondack-Aire Blower Section

Model No.	Shipping Weight (lbs)
09	145
12	145
15	145