

# ADIRONDACK-AIRE zer0zone 410-A

SERIES

# EA


PACKAGED TERMINAL AIR CONDITIONING/ HEAT PUMP

**NOMINAL CAPACITY:**

**Replacement PTAC/ PTHP Chassis: Replaces McQuay  
'EA', 'ES', & 'RS', IslandAire 'ED', & RetroAire 'RC-35'**

9,000, 12,000,  
15,000 BTU/h

ColdPoint Corp, Rome, New York 13440 • Phone (315)339-2331 • Fax (315)339-2358 • Web: www.adirondackaire.com

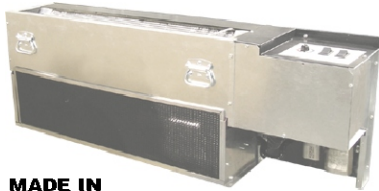

**MADE IN  
USA**

### Description:

*Adirondack-Aire* 'EA' Series zer0zone chassis provides environment friendly, high efficiency cooling and heating where individual, quiet control of space is a priority. This application flexible unit is also a direct replacement for *Islandaire* 'ED' and *RetroAire* 'RC-35'. The chassis is a part of a complete system, which consists of the chassis, wall sleeve, outdoor louver, room cabinet, and optional heat sections. The chassis contains the compressor, indoor and outdoor heat exchangers, fan motors & fans, and controls. The 'EA' is dimensionally compatible with the original for a fast, easy, and trouble free installation. Quality components, careful design and testing and the latest in environment friendly technology assure EPA compliance, long life, user satisfaction, and lower energy cost! Consider the extensive list of standard features which include

**Rust-Block\*** corrosion protection system, centrifugal condenser blower, evaporator freeze protection, permanent electrostatic air filter, pull handle, and high-pressure over protection and *Adirondack-Aire* is the replacement solution the competition can't match. *Cold Point Corp.* backs the 'EA' with a customer friendly one-year parts and labor warranty and five-year compressor warranty, (see Warranty document for details). Heat Pumps are available and include a thermostatic expansion valve and condenser drain pan valve. Contact the factory for availability of heat pumps.

### Application & Benefits:

The *Adirondack-Aire* 'EA' series replacement chassis fits the existing wall sleeves and room cabinets without modification. A centrifugal condenser fan provides proven airflow performance with higher static capability than axial fans found in competitor's units. The standard high-pressure switch and evaporator freeze protection stops unit operation before damage occurs should airflow become reduced or obstructed due to dirty coils, obstructed airflow, or motor failures or lock-up.....a premium feature usually found only in expensive commercial systems. Condensate re-evaporation and the **Rust-Block** system assure a stain-free building exterior. High efficiency compressors provide demonstrated reliability and low sound levels and cut energy costs...and because the chassis dimensions and construction details are like the original, replacement work is fast and easy. A chassis pull handle is provided to facilitate easy removal and handling. Using *Adirondack-Aire* replacements eliminates the need for room and exterior wall renovation and is the solution that gets your property back in service quickly and at the lowest total cost. Choose the optional room cabinet to give the unit a brand new look and improve room aesthetics.

### Options/Accessories:

- Heat Pump (consult factory)
- Motorized fresh air
- Wall Sleeves (consult factory)
- Electric heat or Hydronic heat
- Cabinets (consult factory)
- Louvers (consult factory)
- Control options

\* Rust-Block corrosion protection system consists of:  
•Heavy gauge galvanized steel construction with powder paint finished condenser & evaporator pans

•Galvanized or Aluminum Condenser Fan  
•Stainless steel compressor and condenser motor studs

•Magnaguard and/or stainless steel screws and fasteners

### Standard Features

- 1). Made in USA
- 2). Designed for easy installation. Dimensionally compatible with original *McQuay*, *IslandAire*, & *RetroAire* chassis.
- 3). Exclusive **Rust-Block corrosion protection**
- 4). High efficiency PSC fan motors w/built-in temperature protection
- 5). UL listed components and construction
- 6). Quiet, durable, and efficient compressor with built-in pressure & temperature protection
- 7). Heavy Gauge G60 galvanized steel construction with powder coat painted condenser & evaporator pans
- 8). High efficiency copper tube-aluminum fin evaporator and condenser coils
- 9). Centrifugal condenser fan
- 10). Condensate re-evaporation
- 11). High Pressure switch with manual reset
- 12). Frost free low ambient cooling\*
- 13). Electrostatic air filter
- 14). Chassis pull handle facilitates easy chassis removal & handling
- 15). Heat pump heating to 35°F outdoor\*\*
- 16). Capillary expansion. Thermostatic expansion valve (heat pumps)
- 17). Positive shift reversing valve (heat pumps)
- 18). Precision charged with zer0zone R-410A refrigerant
- 19). Line Cord (ex. 265V)

\*Cooling operation locks-out at 34° F outdoor temperature and restarts @ 55° F. \*\*Actual temperature affected by relative humidity, solar effect, etc.

**26**


01/10



# EA Dimensions and Specifications

**Note:** Due to Cold Point Corporation's ongoing quality & product development programs, design and specifications may change. Always consult factory to verify the information provided here.

## DIMENSIONAL DETAIL 'EA'

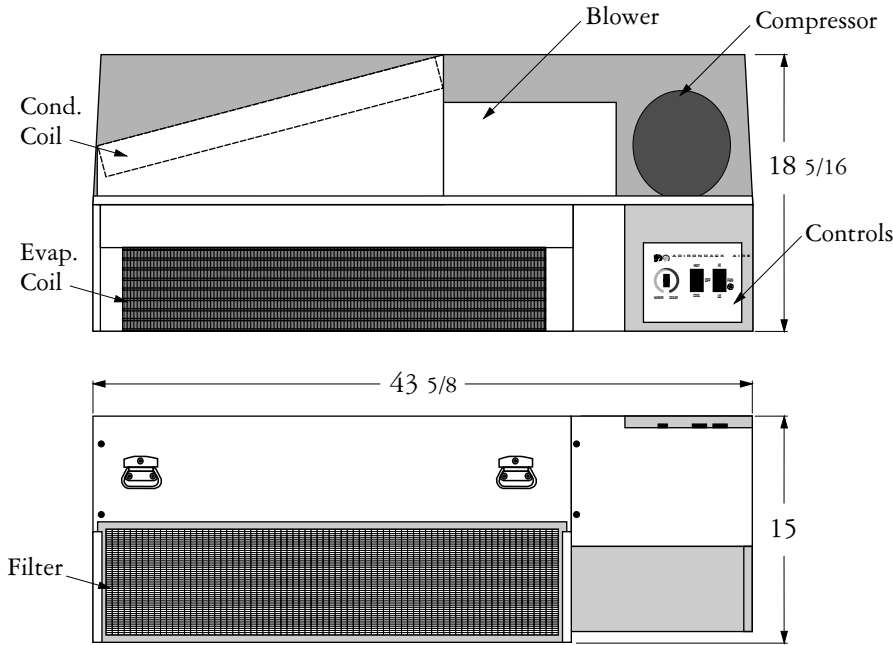

### EA zerOzone CHASSIS ELECTRICAL RATINGS (1)

Model	Voltage/ HZ/Ph	Evap. Mtr. HP	Evap. Mtr. Amps	Cond. Mtr. HP	Cond. Mtr. Amps	Comp RLA	Comp LRA	TOTAL AMPS	CKT AMPAC	MAX FUSE	MIN. Volts	Line Cord
EA-09	115/60/1	1/10	1.2	1/5	3.2	8.0	50.0	12.4	14.4	20	104	5-20P
EA-09	208/230/60/1	1/10	0.6	1/5	1.2	3.7	22.0	5.5	6.4	15	197	6-15P
EA-09	265/60/1	1/10	0.6	1/5	1.2	3.5	22.0	5.3	6.2	15	240	N/A
EA-12	115/60/1	1/10	1.2	1/5	3.2	10.5	57.0	14.9	17.5	25	104	5-20P
EA-12	208/230/60/1	1/10	0.6	1/5	1.2	5.2	26.0	7.0	8.3	15	197	6-15P
EA-12	265/60/1	1/10	0.6	1/5	1.2	4.3	25.0	6.1	7.2	15	240	N/A
EA-15	208/230/60/1	1/10	0.6	1/4	2.0	6.6	33.0	9.2	10.9	15	197	6-15P
EA-15	265/60/1	1/10	0.6	1/4	1.1	5.6	28.0	7.3	8.7	15	240	N/A

(1) If electric heat option is selected see Electric Heat Ratings Table: Total AMPS, Ampacity & Fuse size is the larger value.

### NEMA Configurations

#### Non Locking Plugs/Receptacles

Voltage	125V	250V	277V
15A Recp.	5-15R 	6-15R 	7-15R 
15A Plug	5-15P 	6-15P 	7-15P 
20A Recp.	5-20R 	6-20R 	7-20R 
20A Plug	5-20P 	6-20P 	7-20P 
30A Recp.	5-30R 	6-30R 	7-30R 
30A Plug	5-30P 	6-30P 	7-30P 

### Electric Heat Ratings (optional)

Heater No. (wcu)	Volt	Watts	BTU/h	HTR Amps	Total HTR Amps	Min CKT Amps	Max. Fuse	Line Cord
2	208	1,800	6,140	8.7	9.3	12.0	15	6-15P
	230	2,200	7,500	9.6	10.2	13.0	15	6-15P
	265	2,900	9,900	10.9	11.5	15.0	15	N/A
	277	3,190	10,900	11.5	12.1	15.0	15	N/A
3	208	2,450	8,350	11.8	12.4	16.0	20	6-20P
	230	3,000	10,200	13.1	13.7	17.0	20	6-20P
	265	4,000	13,640	15.1	15.7	20.0	20	N/A
	277	4,350	14,830	15.7	16.3	21.0	25	N/A
4	208	3,270	11,150	15.7	16.3	21.0	25	6-30P
	230	4,000	13,640	17.4	18.0	23.0	30	6-30P

### EA zerOzone PERFORMANCE TABLE (Tested in Accordance w/ARI)

Model	COMP	Cond. Fan Type/Air Direction	Cool BTUH	SENS BTUH	EER	CFM HI/ LO*	REFRIG
EA- 09	Rotary	Centrifugal/ Blow Thru	8,900	8,100	9.0	440/330	410A
EA- 12	Rotary	Centrifugal/ Blow Thru	11,000	8,300	8.4	440/330	410A
EA- 15	Rotary	Centrifugal/ Blow Thru	15,400	11,900	8.2	550/400	410A

\*Dry Coil Airflow

Model No.	Chassis Weight (lbs)
09	130
12	130
15	145